



Echoview Data File Format
Version: 4.0 Document Revision 1

Contact

Echoview Software Pty Ltd
 GPO Box 1387 | Hobart | Tasmania | Australia 7001
 Telephone: +61 (0)3 62315588 | Fax: +61 (0)3 62341822
 Email: sales@echoview.com | support@echoview.com

Notice of Proprietary Rights

The contents of this document are subject to change without notice. This document confers upon the recipient no right or license to make, have made, or sell any technology or inventions described herein.

Disclaimer

Echoview Software Pty Ltd does not represent or warrant that the Echoview Data File Format will be complete, correct, accurate or otherwise reliable or that defects will be corrected. Echoview Software shall not be liable for any loss, injury, claim, liability, or damage of any kind resulting in any way from any errors in the data format or any information arising from its use.

REVISION HISTORY

Date	Format Version	Document Revision	Author	Description
7 Oct 2016	1	0	SW, GM	Draft and QA of the Echoview Data Format Definition document.
6 Dec 2016	1	1	SW	Change for Calibration element: CalibrationOffsetSv replaces SvOffset and CalibrationOffsetTs replaces TsOffset.
13 Jan 2017	1	2	SW	Update for the PingData element, the PingIndex attribute is no longer required and has been removed.
16 Feb 2017	1	3	SW	Update for Calibration element, attribute AbsorptionCoefficient, that may be used with Packet element MultibeamPing. Update for a new Transducer element that may record useful transducer related information. Update for BeamAngles element, attribute BeamSpread precision increased to 10 decimal places. Parameter element, Echosounder attribute moves to Transducer element. Echoview 8, the first version of Echoview that can read EVD files, was released.
20 Jul 2017	1	4	SW	Update for the mandatory FileInfo element, new attribute FormatVersion. Update for Calibration element, attribute TransceiverImpedance. This is needed for EK80 data recorded by Simrad WBT units.

Date	Format Version	Document Revision	Author	Description
3 Jul 2018	2	1	SW, CB	<p>The following updates and additions can be read using Echoview 9:</p> <p>Optional compression of PingData values is now available. Four levels of compression are available using the new CompressedDouble, CompressedFloat, CompressedShort, CompressedByte values available in the SamplePrecision attribute, with the supporting attributes CompressedByteCount, CompressedMaxValue and CompressedMinValue used to read the compressed data.</p> <p>Single target support is available under the Packet element, attribute Type SinglebeamPing. The PingData element supports SingleTarget in the ResultDataType, StorageDataType and SamplePrecision attributes. Single target properties are specified under the new SingleTarget element (within the PingData element).</p> <p>Single beam or multibeam boolean support is available under the Packet element, attribute Type SinglebeamPing or Type MultibeamPing. The PingData element supports Boolean in the ResultDataType, StorageDataType and SamplePrecision attributes.</p> <p>The Packet element now offers the attribute Type RangeLine. This together with a Calibration element and Parameter element can be used to define a line-point in the range dimension.</p> <p>Update for Calibration element, attribute Acidity: the minimum value was changed from 1 to 0.</p> <p>Update for Calibration element: a new optional attribute NumberOfTransducerSegments has been added. This is only needed for Simrad EK80 data that is exported from Echoview to the EVD format.</p> <p>The PingData element now includes optional MinorAxisSteeredAngle and MajorAxisSteeredAngle attributes to define the steering angle of individual single beams which have come from multibeam files (e.g. ME70 data).</p>
23 May 2019	3	1	CB	<p>The following update can be read using Echoview 10:</p> <p>Removed PingData element SamplePrecision attribute values Medium and Low compression. The supporting PingData attributes CompressedShort and CompressedByte are removed as well.</p>

Date	Format Version	Document Revision	Author	Description
21 Feb 2020	3	1	SW	<p>The following update can be read using Echoview 10:</p> <p>This feature is used by the data file format but was incompletely documented. SingleTarget element attribute PulseCompressed flags that single target detection-wideband operator detected the single targets.</p>
24 Feb 2020	4	1	SW	<p>The following update can be read using Echoview 11:</p> <p>SingleTarget element attribute PulseCompressed is deprecated.</p> <p>SingleTarget element attribute DetectionMethod flags the single target detection method used to detect the single target.</p> <p>Calibration element attribute CalibrationOffset for single beam data.</p> <p>Calibration element attributes CalibrationOffset and BeamOffsets for multibeam data.</p>

Contents

1 Introduction.....	7
1.1 Purpose	7
1.2 Glossary.....	7
2 Conventions	9
2.1 Overview.....	9
2.2 Platform Axes	9
Fixed Platform.....	9
Mobile Platform	9
2.3 Beam geometry	10
Axes	10
Angles	10
Multibeam.....	11
Multibeam Tilt.....	11
Multibeam Bearing	11
2.4 Ping modes.....	11
3 Equations	12
Power.....	12
Power to Sv equation.....	12
Power to TS equation	12
Compression algorithms	13
4 Exporting to EVD from Echoview	15
5 File Naming and Structure	16
Naming	16
Example	16
Structure	16
XML Element Example	16
6 FileInfo Element	17
Tag	17
Description	17
Attributes.....	17
Examples	17
7 Packet Element	18
Tag	18
Description	18
Attributes.....	18

Examples	19
8 Transducer Element.....	20
Attributes	20
Example	20
9 Parameters Element	21
Tag	21
Description	21
Attributes	21
Examples	23
10 Calibration Element.....	25
Tag	25
Description	25
Attributes	25
Examples	28
11 PingData Element	29
Tag	29
Description	29
Attributes	30
Examples	32
12 BeamAngles Element.....	35
Tag	35
Description	35
Attributes	35
Examples	35
13 BeamsWithData Element	36
Tag	36
Description	36
Attributes	36
Example	36
14 SingleTarget Element.....	37
Tag	37
Description	37
Attributes	37
Example	42
15 Complete Packet Examples	43
SinglebeamPing with TRFactor	43

SinglebeamPing	43
SinglebeamPing Single target data.....	44
SinglebeamPing Boolean data.....	44
SinglebeamAnglePing.....	45
MultibeamPing	45
MultibeamPing Boolean data	45
MultibeamAnglePing	46
MultibeamPing H-mode data	46
MultibeamPing BeamsWithData	47
Position	47
Heading.....	47
DepthLine.....	47
Distance	47
RangeLine.....	48

1 Introduction

1.1 Purpose

The Echoview Data File Format defines the structure of *.EVD data files. By writing to the Echoview Data File Format an otherwise unsupported instrument can make itself compatible with [Echoview](#). Echoview itself both reads and writes ([exports](#)) Echoview Data File Format files.

The Echoview Data File Format supports the following [variable](#) types:

- Single beam: Power, Sv, TS, Unspecified dB and Angular position
- Multibeam: Sv, TS, Magnitude, Unspecified dB and Angular position
- Heading, Pitch, Roll, (GPS) Position, (Vessel log) Distance and Line

You can view a current version of [EchoviewDataFileFormat.pdf](#) in a browser or download the document from the [Echoview website](#) under Technical Support, Downloads, Echoview Data File Format.

1.2 Glossary

Altitude	Altitude is calculated with respect to the position of a platform system reference point. Values above the platform reference point are positive.
Angular position	The position of the sample in the beam, generally recorded as two angles. See also Beam Geometry: Angles .
ANSI text	Human-readable data. American National Standards Institute character encoding, typically for English characters.
Binary data	Data that is not human-readable. Binary data uses the binary number system (1 and 0) to represent data.
Boolean	Logical value (either true or false).
Channel	A channel identifies one stream from a number of streams of the same data type. For supported instrument file formats, channel allocation may be arbitrary or according to a manufacturer's convention. E.g. Dual beam echosounder: TS narrow beam (channel 1), TS wide beam (channel 2). E.g. Multiplexed data: Sv pings (channel 1), Sv pings (channel 2), Sv pings (channel 3).
Depth	Depth is a measure of vertical distance below a system reference water level. Values below the water level reference are positive.
Echoview	Echoview® is a software package for hydroacoustic data processing, delivering powerful and flexible capabilities for water column and bathymetric echosounder and sonar data processing.
Echocheck	Echocheck is a stand-alone utility designed to test echosounder data files. Echocheck will scan data files for certain corruptions and problems that could cause Echoview to fail. We recommend running Echocheck on any data files that cause problems with Echoview. In some cases Echoview support may be able to assist you in repairing a damaged file.
ECS file	The Echoview Calibration Supplement file. Calibration settings can be specified and changed in the ECS file. Refer to <i>About ECS files</i> in the Echoview help file.
Fileset	An Echoview Fileset manages data files.
Float	A number represented by a mantissa and an exponent according to a given number base. The value is 32-bits long.
Double	A number represented by a mantissa and an exponent according to a given number base. The value is 64-bits long.

Heading	The direction in which the platform is pointing.
Integer	A positive or negative whole number, such as 37, -50, or 764.
Little Endian	A method of storing a number. It stores the least significant byte first. Little endian is used by x86 Windows systems.
Magnitude	Uncalibrated echo magnitude in linear units.
No data	Echograms can contain samples that have no data values. Refer to <i>About no data</i> in the Echoview help file for more information.
Ping	An acoustic pulse (a short burst of sound at the operating frequency) from a transducer and the echo trace measured from that pulse. It is also used to refer to the representation of an echo trace in Echoview. See also Ping modes .
Pitch	Rotation of the platform (typically a vessel) about the athwartship (Y) axis. Positive pitch on a vessel in motion indicates an upward bow, that is the bow side of the platform rises and the stern side descends.
Platform	Object on which the echosounder or sonar is mounted. See also Platform Axes .
Power	Power (dB re 1W) is the received power recorded by a data acquisition system. See also Power conversion equations .
Range	Range is a measure of linear distance from the center of the transducer face. Values in front of the transducer face are positive. See also Beam Geometry . Refer to <i>About depth, range and altitude</i> in the Echoview help file for more information.
Roll	Rotation of the platform (typically a vessel) about the alongship (X) axis. Positive roll on a vessel in motion indicates starboard roll, that is the starboard side of the platform lowers and the port side rises.
Sample	A data point in a ping on an echogram. A sample has an acoustic data measurement, a range (for the middle of the sample) and a nominal (sample) thickness. The first sample begins at the StartRange. The last sample ends at the StopRange. See also Sample range calculation .
Single target	A 'single target' is the representation of an acoustic echo attributed to a single backscattering target detected within the beam of an echosounder. Each single target has a number of properties. Target Strength (TS), range and angles from the transducer are notable, but many other properties are available for analysis.
Sv	Sv is a measurement of a received echo calculated with respect to a standard volume. Sv may be calculated using a Power to Sv equation.
String	A data structure composed of a sequence of characters usually representing human-readable text.
TS	TS is a measurement of a received echo calculated with respect to a point. TS may be calculated using a Power to TS equation.
Transducer	A transducer is a device that converts electrical signals into a transmitted acoustic pulse (ping) and converts received acoustic echoes back into electrical signals. In Echoview a transducer is a logical object in the software that represents the position and orientation of a physical transducer or data acquisition device on a platform .
Tag	A tag is XML syntax that encloses an XML element and the element's attributes. The syntax is often specified under the element's description. E.g. <code><Calibration ... /></code> E.g. <code><Packet ... >... </Packet></code>

Unspecified dB	Sample values in dB that are not Sv or TS. E.g. Unspecified dB values can arise from subtracting one Sv value from another Sv value.
Variable	An Echoview variable is a time-series of measurements of one data type. Echoview uses variables to organize source data (e.g. data files from an echosounder) for display, analysis, export and other purposes. Variable data types supported by the Echoview Data File Format are listed under the Type attribute of the Packet element.
Virtual variable	Echoview creates a virtual variable by applying an Echoview Operator (bespoke algorithm) to a variable or variables. A virtual variable has settings and the virtual variable can be a member of a virtual variable chain. A change to settings or change to preceding variables in the chain causes a recalculation of the virtual variable.
XML	Extensible Markup Language (XML) defines a set of rules for encoding documents in a format that is both human-readable and machine-readable.

2 Conventions

2.1 Overview

[Echoview](#) conventions are discussed in detail in the Echoview help file (Echoview.chm).

- The help file is installed with Echoview.
- A current version of the help file is available on the Echoview website.

2.2 Platform Axes

The [platform](#) axes are specified in the following ways. This may affect [heading](#) and [transducer](#) geometry/orientation.

Fixed Platform

The platform system reference point (0, 0, 0) is in a platform space where:

- The X axis is defined to run south-north (positive northwards, negative southwards)
- The Y axis is defined to run west-east (positive eastwards, negative westwards)
- The Z axis is defined to run vertically (positive downwards, negative upward)

The geographic location for the platform system reference point is to a specified latitude, longitude and altitude. Positive altitude is upwards.

Mobile Platform

The platform system reference point (0, 0, 0) is in a platform space where:

- The X axis is defined to run alongship (positive towards the bow, negative towards the stern)
- The Y axis is defined to run athwartship (positive towards starboard, negative towards port)
- The Z axis is considered to run vertically (positive downwards, negative upwards)

The altitude of the system reference point ($Z = 0$) may be specified. Positive altitude is upwards.

Refer to *About transducer geometry* in the Echoview help file for more information.

2.3 Beam geometry

Echoview supports the identification of target position within a sonar beam. The definition of beam shape for single beam, split beam, dual beam and multibeam echosounders is called beam geometry in Echoview. See also [Ping modes](#).

Axes

Echoview uses three axes to describe beam geometry: beam axis, minor axis and major axis. [Range](#) from the transducer is measured along the beam axis and position in the beam is measured from the beam axis (along the minor and major axes). This system is shown in Figure 1.

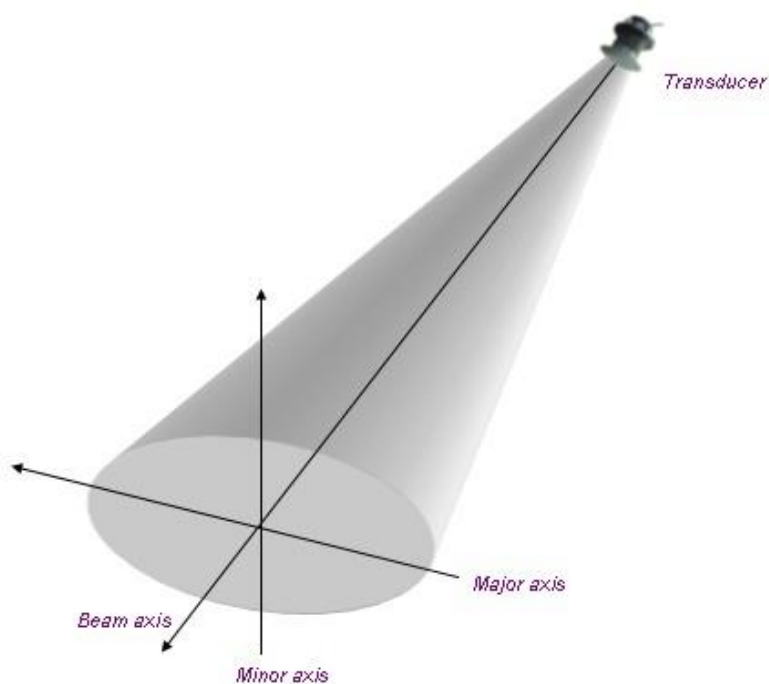


Figure 1: Beam Axes

Table 1 shows the different naming conventions for the minor and major axes adopted by different manufacturers.

Table 1 equivalent axis terminology for selected manufacturers of echosounders

Manufacturer	Preferred Minor Axis Terminology	Preferred Major Axis Terminology
BioSonics	Minor	Major
HTI	Up-down	Left-right
Simrad	Alongship or Longitudinal	Athwartship or Transversal
Precision Acoustic Systems	y	x

Angles

Angles in Echoview are referred to as minor-axis or major-axis angles.

The minor-axis angle is a measure of angle from the beam axis along the minor axis. Looking from the transducer, the positive direction for the minor axis angle is forwards.

The major-axis angle is a measure of angle from the beam axis along the major axis. Looking from the transducer, the positive direction for the major axis angle is to starboard.

Together minor- and major-axis angles and range define a point in the beam.

Refer to *About beam geometry* in the Echoview help file for more information.

Multibeam

Multibeam echosounders combine many individual beams into one picture, typically depicted as a sector plot. This sector plot depicts a surface, either in the form of a flat sector or a conical surface ([H-mode](#)). The minor and major axes are defined consistently in Echoview (for each individual beam and all beams together) as follows:

Sector: The axes of the individual beams and of the entire sector (viewed as one image) are defined as follows:

- Major-axis - in the plane of the sector
- Minor-axis - orthogonal to the plane of the sector

Cone: The axes of the individual beams and of the entire cone (viewed as one image) are defined as follows:

- Major-axis - tangential to the surface of the cone
- Minor-axis - orthogonal to the surface of the cone

Multibeam Tilt

Tilt applies to [H-mode](#) and [S-mode](#) beams in multibeam scanning or omnisonar systems.

Tilt is a term used for scanning sonar systems to describe the angle of a beam fan from the horizontal. Tilt angles range from -10 to 90 degrees. Zero degrees tilt is defined as horizontal and 90 degrees tilt as vertical downwards - negative tilt is above the horizontal. See your echosounder details for further information.

Multibeam Bearing

Bearing applies to [V-mode](#) and [S-mode](#) beams in multibeam scanning or omnisonar systems.

Bearing is a term used for scanning sonar systems to describe the angle of clockwise vertical rotation of a beam fan. Bearing angles range from 0 to 360 degrees. Zero bearing is defined in an instrument specific manner. See your echosounder details for further information.

2.4 Ping modes

Echoview supports a number of [ping](#) configurations and shapes.

Ping mode	Description
Single beam	A standard single beam is modeled by a straight line in space that follows the beam axis.
Multibeam	A standard multibeam beam fan is modeled by a flat sector in space.
H-mode	An H-mode multibeam is modeled by the shell of a cone in space. The cone angle (tilt) is permitted to change from ping to ping.
V-mode	A V-mode multibeam is modeled by a flat sector in space where the bearing is permitted to change from ping to ping.
S-mode	An S-mode multibeam is modeled by a flat sector in space where the tilt and bearing are permitted to change from ping to ping.

Refer to *About ping modes* in the Echoview help file for more information.

3 Equations

Power

$$Power = P_r \tag{1}$$

Power to Sv equation

$$Sv = P_r - TRFactor + 20\log_{10}(Range) + 2 * AbsorptionCoefficient * Range - 10\log_{10}\left(\frac{SoundSpeed*TransmittedPulseLength}{2}\right) - TwoWayBeamAngle + CalibrationOffsetSv \tag{2}$$

Power to TS equation

$$TS = P_r - TRFactor + 40\log_{10}(Range) + 2 * AbsorptionCoefficient * Range + CalibrationOffsetTs \tag{3}$$

Where:

Power (dB re 1W) is specified under PingData **attributes** ResultDataType and StorageDataType and written as binary data in **little endian** format.

Range (m) is the range of the middle of a sample in the ping. A sample in a ping has a sample start-range and a sample stop-range. These sample ranges are calculated using the sample thickness which itself is calculated with the PingData attributes **StartRange**, **StopRange** and **SampleCount**.

$$Sample\ thickness = (StopRange - StartRange) / SampleCount \tag{4}$$

Sample numbering (N) is from sample (0) to sample (SampleCount - 1).

StartRange is the start range for sample 0.

StopRange is the stop range for sample (SampleCount - 1).

$$Sample\ N\ start\ range = StartRange + (N * Sample\ thickness) \tag{5}$$

$$Sample\ N\ stop\ range = Sample\ N\ start\ range + Sample\ thickness \tag{6}$$

$$Sample\ N\ range = Sample\ N\ start\ range + (Sample\ thickness / 2) \tag{7}$$

AbsorptionCoefficient is a Calibration **attribute**.

P_r in dB re 1W is the received power.

SoundSpeed is a Calibration **attribute**.

TransmittedPulseLength is a Calibration **attribute**.

TwoWayBeamAngle is a Calibration **attribute**.

TRFactor is a Calibration **attribute**. It can either be specified under attribute TRFactor or it can be calculated by Echoview using data from the Calibration attributes TransducerGain, Frequency and TransmittedPower:

$$TRFactor = 10\log_{10}\left(\frac{TransmittedPower * LinearGain^2 * \lambda^2}{16\pi^2}\right) \tag{8}$$

Where:

$$\lambda = \frac{SoundSpeed}{Frequency} \tag{9}$$

$$LinearGain = 10^{\frac{TransducerGain}{10}} \tag{10}$$

CalibrationOffsetSv is a Calibration attribute. It is a system/instrument constant that can be associated with hydroacoustic calibration.

CalibrationOffsetTs is a Calibration attribute. It is a system/instrument constant that can be associated with hydroacoustic calibration.

Compression algorithms

Binary sample data can be compressed. The PingData attribute SamplePrecision determines the compression algorithm used. The PingData attribute CompressedByteCount is required to read the compressed data.

Under the Echoview export to the Echoview Data File Format, a specified Compression Quality sets the (compression) SamplePrecision.

Algorithm 1

Algorithm 1 is used when:

SamplePrecision = "CompressedDouble" or SamplePrecision = "CompressedFloat" is specified.

This algorithm exploits the way the binary data is stored within double and float precision values.

Description	Bit Range Double	Bit Range Float
Sign	63	31
Exponent	62 - 52	30 - 23
Fraction (Mantissa)	51 - 0	22 - 0

Since the sample data values will often have a similar magnitude, it is common for at least the exponent part of the values to be the same. Therefore, it is possible to only write out the parts of each value that actually differ. The process by which Algorithm 1 is as follows:

- Each sample has its sign bit demoted from the most significant bit to the least significant bit.
- The samples are then written in blocks with the same pattern repeated for each block
- The first value for the block consists of the first sample, written in full.
- The next sample is then checked to see how many bytes are the same as the first, when checked from the most significant byte to the least.
- If there is at least one byte shared, then this check is repeated on each subsequent sample until one is found which shares less bytes with the original value.
- The results of the checking are written into a single byte which is written to file immediately after the first sample.

Bits 4-7	The number of bytes shared with the first value, maximum of 8 for CompressedDouble, and 4 for CompressedFloat.
Bits 0-3	The number of samples with the same number of shared bytes, maximum of 15.

- Each of the samples which share bytes is then written to the file, but without the shared bytes. For example if a double precision sample shared 2 bytes with the first sample of this block, then only its least significant 6 bytes would be written to file.

Algorithm 2

Algorithm 2 is used when:

The PingData element specifies ResultDataType="Boolean", StorageDataType="Boolean" and SamplePrecision="CompressedBoolean".

Blocks of sequential, common boolean sample values, in a ping, are recorded as CompressedBoolean bytes. The most significant bit of a CompressedBoolean byte records the boolean type (True (1) or False (0)) of the block of samples in the ping. The rest of the CompressedBoolean byte records the integer number of samples of the boolean type in the block. There can be a variable number of CompressedBoolean bytes in each ping.



4 Exporting to EVD from Echoview

Echoview exports [variable data types](#) to the Echoview Data File Format.

Echoview Data File Format files added to a [Fileset](#) in Echoview will be displayed as derived raw variables.

The Echoview Data File Format currently supports only some of the Echoview calibration settings.

5 File Naming and Structure

Naming

EVD files must have the .evd extension to be recognized by Echoview.

Echoview reads data files based on their filenames, in alphanumeric order. Ensure data files are named to reflect their chronological order. Data files with pings that are not in strict time order with existing pings from other files take longer to read.

Example

```
AnyFileName_D15_03_2016_T1420.EVD
```

```
AnyFileName_D15_03_2016_T1700.EVD
```

Structure

An EVD file is structured as a series of [XML](#) elements written as [ANSI](#) text with [binary](#) data written as [little endian](#).

Each element consists of an identifying [Tag](#), followed by attributes in the form of AttributeName="Value" pairs. Note the essential quotation marks enclosing the Value.

This document describes supported types of element. Some elements contain binary data, which means that the file is not pure XML and therefore may not display correctly in a typical XML file viewer. Binary data should be written as little endian. The value $-9.9e+37$ represents [no data](#).

We recommend [Echocheck](#) be used to assess the validity of EVD files.

XML Element Example

```
<Packet Type="Singlebeam">
```

The element includes enclosing angle brackets. Its tag is `Packet`, and it has the single attribute `Type` with a value of `Singlebeam`. Not all attributes are mandatory. The detailed descriptions in this document indicate which attributes are optional.

6 FileInfo Element

Tag

FileInfo

Description

This mandatory element comes first in any EVD file.

Attributes

Name	Type	Value	Required	Notes
Type	String	EVD	Yes	Must be EVD in order for Echoview to correctly identify the file.
FormatVersion	Real	E.g. 1.0	Yes	The version number of the Echoview Data File Format. The version number is displayed on the cover of this document. Note: Refer to the latest Echoview Help file for a list of Echoview versions compatible with EVD versions.
Writer	String	E.g. Echoview 8.0.16.29582	Yes	A description of the application/device that wrote the file. It would typically include the application's name and version.

Examples

```
<FileInfo Type="EVD" FormatVersion="1.0" Writer="Echoview (R) 8.0.16.29582"/>
```

```
<FileInfo Type="EVD" FormatVersion="1.0" Writer="ApplicationName/Device (R) 2016"/>
```

7 Packet Element

Tag

Packet

Description

Packets are the core elements of EVD files. For example, a series of Packet elements, one for each ping, can store single beam data. A Packet element contains one or more other elements, depending on its type, and must be terminated by the `</Packet>` tag.

Attributes

Name	Type	Value	Required	Notes
Type	String	DepthLine Distance Heading MultibeamAnglePing MultibeamPing Pitch Position RangeLine Roll SinglebeamAnglePing SinglebeamPing TransducerList	Yes	Identifies the nature of the Packet.

SinglebeamPing and SinglebeamAnglePing Packets are used for single beam Sv, TS, unspecified dB, single target, boolean and angular position ping data.

MultibeamPing and MultibeamAnglePing Packets are used for multibeam Sv, TS, magnitude, unspecified dB, boolean and angular position ping data.

TransducerList Packets are used for adding transducer information. The [Transducer element ID](#) attribute is the same number as the [Parameters element](#) Transducer attribute. A TransducerList Packet applies to all pings that appear after the Packet. To affect all pings in the EVD file, the TransducerList Packet needs to be written near the start of the EVD file.

Roll Packets are used for roll data.

Pitch Packets are used for pitch data.

Heading Packets are used for heading data.

Distance Packets are used for vessel log data.

DepthLine Packets are used for lines that are defined in the depth dimension such as Echoview raw and virtual lines, heave and altitude lines.

RangeLine Packets are used for lines that are defined in the range dimension, such as sounder-detected line data. Packets for Type=RangeLine also require a [Calibration element](#) and a [Parameters element](#) Transducer attribute.

Position Packets are used for GPS position data.

Examples

```
<Packet Type="SinglebeamPing">  
  <Parameters .../>  
  <Calibration... .../>  
  <PingData... ...>  
  </PingData>  
</Packet>
```

```
<Packet Type="Position">  
  <Parameters... .../>  
</Packet>
```

See also [Complete Packet Examples](#).

8 Transducer Element

The `Transducer` element begins with `<Transducer` and requires an `ID` attribute that matches the `Parameters` element `Transducer` attribute. A number of optional and customizable `AttributeName="Value"` pair attributes may follow. The strings represent any transducer detail that you would like to record. The element is terminated by `>/>`.

Attributes

Name	Type	Value	Required	Notes
ID	Integer	1 ... n	Yes	Specifies the value of the <code>Transducer</code> attribute of the <code>Parameters</code> element.
AttributeName ... AttributeNameN	String	Value ... ValueN	No	<p>AttributeName is a string that represents any transducer detail you would like to record such as:</p> <pre>Echosounder="SimradEx60" SerialNo="123654" FaceType="Circular" FaceType="Ellipse7.3" CalSphere="WC75mm" CalSphere="WC84mm"</pre> <p>Note: Echoview may export an <code>EchoSunder</code> attribute.</p>

Example

```
<Packet Type="TransducerList">
  <Transducer ID="1" Echosounder="SimradME70" SerialNo="MY4468-5"
  Processor="XPT20"/>
</Packet>
<Packet Type="SinglebeamPing">
  <Parameters Time="13/07/2008 04:10:29.9940" Transducer="1" Channel="0"
  Source="Fileset1: Sv raw pings T1" />
  <Calibration... .../>
  <PingData... ...>
  </PingData>
</Packet>
```

9 Parameters Element

Tag

Parameters

Description

All `Packet` elements must include a `Parameters` sub-element. This defines the critical information about the `Packet` which allows Echoview to read and understand it correctly. The attributes required for the `Parameters` element depend on the `Packet Type`.

Attributes

Name	Type	Value	Packet use	Notes
Channel	Integer	0 ... n	All	The channel within the data.
Time	String	E.g. 08/11/2009 07:16:03.7710	All	The time and date associated with this data packet. The format must be "DD/MM/YYYY hh:mm:ss.ssss"
Source	String	Examples: Sv pings, AllNoiseRemoved	Optional	Description of the source for this data. The export of data from Echoview lists the originating raw or virtual variable as the source.
Bearing	Double	0.0 ... 359.0	Optional for: MultibeamAnglePing MultibeamPing	The bearing of the multibeam cone, in degrees. The default value is 0 degrees.
PingMode	String	HMode, Multibeam, SMode VMode	MultibeamAnglePing MultibeamPing	Refer to Ping modes .
TiltAngle	Double	-10.0 ... 89	Optional for: MultibeamAnglePing MultibeamPing	The tilt angle of the multibeam cone, in degrees. The default value is 0 degrees.

Name	Type	Value	Packet use	Notes
Transducer	Integer	0 ... n	RangeLine MultibeamAnglePing MultibeamPing SinglebeamAnglePing SinglebeamPing	The transducer number for this ping data or line. Notes: Additional transducer information may be specified. Use a Packet element <code>Type=TransducerList</code> followed by a Transducer element with an <code>ID</code> attribute that matches the <code>Parameters</code> element <code>Transducer</code> attribute. (Customized) Transducer details may be listed after the <code>ID</code> attribute.
Distance	Double	Real	Distance	The vessel log distance travelled, in nautical miles.
Heading	Double	0 ... 360.0	Heading	The heading of the platform . 0 degrees is North.
Pitch	Double	-180.0 ... 180.0	Pitch	The pitch angle of the platform . Positive values are bow upwards.
Roll	Double	-180.0 ... 180.0	Roll	The roll angle of the platform . Positive values are port upwards.
Depth	Double	Real	DepthLine.	The depth (m) of the line point.
Status	String	Bad, Good, None, Unverified	DepthLine	The status of the line point. Refer to <i>About line status</i> in the Echoview help file for more information.

Name	Type	Value	Packet use	Notes
Latitude	Double	-90.0 ... 90.0	Position	Latitude (GPS) position in decimal degrees.
Longitude	Double	-180.0 ... 180.0	Position	Longitude (GPS) position in decimal degrees.
Status	String	Bad, Good, None, Uncertain, Unknown	Position	The status of the (GPS) position coordinate Refer to <i>Processing GPS data</i> in the Echoview help file for more information. Note: When the EVD file is opened by Echoview, "None" is processed as "Bad".

Examples

```

<Packet Type="SinglebeamPing">
    <Parameters Time="08/11/2009 07:16:03.7710" Transducer="3" Channel="0"/>
    ...
</Packet>

<Packet Type="MultibeamPing">
    <Parameters Time="13/07/2008 04:10:29.9940" Transducer="26" Channel="0"
    Source="Fileset1: Sv pings formed beams" PingMode="Multibeam"/>
</Packet>

<Packet Type="MultibeamAnglePing">
    <Parameters Time="21/04/2015 07:04:30.0460" Transducer="26" Channel="0"
    PingMode="Multibeam"/>
    ...
</Packet>

<Packet Type="DepthLine">
    <Parameters Time="28/08/1996 04:39:23.2600" Channel="0" Depth="316.0"
    Status="Good" Source="Bottom"/>
</Packet>

<Packet Type="DepthLine">
    <Parameters Time="28/08/1996 04:39:24.1900" Channel="0" Depth="315.666667"
    Status="Good" Source="Bottom"/>
</Packet>
    ...

```



```
<Packet Type="RangeLine">
    <Calibration Frequency="50.0" SoundSpeed="1498.0"/>
    <Parameters Time="28/08/1996 04:39:23.2600" Channel="0" Transducer="0"
Range="320.0" Status="Good" Source="Fileset1: line data sounder detected
bottom"/>
</Packet>
<Packet Type="RangeLine">
    <Calibration Frequency="50.0" SoundSpeed="1498.0"/>
    <Parameters Time="28/08/1996 04:39:24.1900" Channel="0" Transducer="0"
Range="318.0" Status="Good" Source="Fileset1: line data sounder detected
bottom"/>
</Packet>
...
```

```
<Packet Type="Heading">
    <Parameters Time="13/07/2008 04:10:31.6440" Channel="0" Heading="253.3"
Source="Fileset1: heading data GPVTG"/>
</Packet>
...
<Packet Type="Heading">
    <Parameters Time="13/07/2008 04:18:18.6060" Channel="0" Heading="247.2"
Source="Fileset1: heading data GPVTG"/>
</Packet>
...
```

See also, [Complete Packet Examples](#).

10 Calibration Element

Tag

Calibration

Description

All ping Packets can include a Calibration element, but it is not mandatory. This element contains one or more calibration specific settings associated with that ping. These settings can be overridden with new values once loaded into Echoview by using an Echoview Calibration Supplement (ECS) file.

Echoview uses calibration values, where available, to perform calculations for the ping. In Echoview, when no calibration value is available from the data file, a default value is used. Whether the default value is suitable is an issue left to the user to verify

SinglebeamPing Packets support the conversion of the ping data between Power to Sv and Power to TS. The Power to Sv and Power to TS equations use several calibration settings which should be specified in order to perform the conversions correctly.

Attributes

These attributes may be specified under SinglebeamPing, SinglebeamAnglePing Packets. The attributes are used for single beam pings with data types of Sv, TS, unspecified dB and angular position.

Name	Type	Value	Required	Notes
AbsorptionCoefficient	Double	0.0000000 ... 100.0000000	No	Absorption coefficient in dB/m.
AbsorptionDepth	Double	0.000 ...10000.000	No	The absorption depth, in meters.
Acidity	Double	0.000 ... 14.000	No	Acidity of the water column, in pH.
CalibrationOffset	Double	-99.900 ... 99.900	No	An offset (dB) that may be used in the calculation of single beam acoustic data. Exported sample value = sample_value – CalibrationOffset
CalibrationOffsetSv	Double	-99.900 ... 99.900	No	Offset (dB) applied to Sv data and used in the Echoview Data File Format Power to Sv equation.

Name	Type	Value	Required	Notes
CalibrationOffsetTs	Double	-99.900 ... 99.900	No	Offset (dB) applied to TS data and used in the Echoview Data File Format Power to TS equation.
EffectivePulseLength	Double	0.001 ... 50.0	No	The effective pulse length used for Sv calculations, in milliseconds.
Frequency	Double	0.01 ... 10000.00	No	Frequency of the transducer in kHz.
TransceiverImpedance	Double	0.0 ... 1000000.0	No	Transceiver impedance (Ohms). For Simrad WBT units, the impedance represents the internal resistance of the unit. The impedance is used in the calculations of the received power for Simrad Ex80 data.
MajorAxisAngleOffset	Double	-9.99 ... 9.99	No	The angle offset in the athwartship direction, in degrees.
MajorAxisAngleSensitivity	Double	0.100000 ... 100.000000	No	The angle sensitivity in the athwartship direction.
MinorAxis3dbBeamAngle	Double	0.00 ... 359.99	No	Minor axis angle (degrees) at which beam profile drops by 3dB.
MinorAxisAngleOffset	Double	-9.99 ... 9.99	No	The angle offset in the alongship direction, in degrees.
MinorAxisAngleSensitivity	Double	0.100000 ... 100.000000	No	The angle sensitivity in the alongship direction.

Name	Type	Value	Required	Notes
NumberOfTransducerSegments	Integer	1 ... 4	No	Number of transducer segments in the beam. The value is recorded in data files output by Simrad EK80 wideband transceivers. 4 is the value for a split beam transducer. 3 is the value for a 3 segment transducer. 2 is the value for a 2 segment transducer. 1 is the value for a single beam transducer.
Salinity	Double	0.000 ... 50.000	No	Salinity of the water column, in parts per thousand.
SoundSpeed	Double	1400.00 ... 1700.00	No	Sound speed in m/s.
Temperature	Double	-10.000 ... 100.000	No	The temperature of the water column, in degrees Celsius.
TransducerGain	Double	1.0000 ... 99.0000	No	The gain (dB) for the transducer.
TransmittedPower	Double	1.00000 ... 30000.00000	No	Transmitted power (Watts).
TransmittedPulseLength	Double	0.001 ... 50.000	No	The duration of the transmitted pulse in milliseconds.
TRFactor	Double	0.0000 ... 1000.0000	No	The transmit-receive factor (dB) for the transducer.
TwoWayBeamAngle	Double	-99.000000 ... -1.000000	No	Equivalent two-way beam angle, in dB re 1 Steradian.

These attributes may be specified under the `MultibeamPing` and `MultibeamAnglePing` Packet. The attributes are used for multibeam pings with data types of Sv, TS, unspecified dB and angular position.

Name	Type	Value	Required	Notes
AbsorptionCoefficient	Double	0.0000000 ... 100.0000000	No	Absorption coefficient in dB/m. Note: AbsorptionCoefficient is included in a multibeam EVD export but is not used to derive multibeam variables. The setting may be required and used by Echoview operators .
CalibrationOffset	Double	-99.900 ... 99.900	No	An offset (dB) applied to all beams and is used in the calculation of multibeam Sv data. Exported sample value = sample_value – CalibrationOffset – BeamOffsets(Beam)
BeamOffsets	Double	-99.00 ... 99.00	No	An array of offsets (dB) that is applied per-beam and is used in the calculation of multibeam Sv data. See (Multibeam ping) CalibrationOffset, Exported sample value.
SoundSpeed	Double	1400.00 ... 1700.00	No	Sound speed in m/s.

Examples

```
<Packet Type="SinglebeamPing">
```

```
  <Calibration AbsorptionCoefficient="0.0509870" Frequency="200.00"
  MinorAxis3dBBeamAngle="6.70" MajorAxis3dBBeamAngle="6.31"
  TransmittedPulseLength="0.128" SoundSpeed="1491.35" TwoWayBeamAngle="-
  20.700001" CalibrationOffsetSv="0.000" CalibrationOffsetTs="0.000"
  TransducerGain="24.8700" TransmittedPower="120.00000"/>
```

```
<Packet Type="MultibeamPing">
```

```
  <Calibration AbsorptionCoefficient="1.0" SoundSpeed="1510.70"/>
```

```
<Packet Type="MultibeamPing">
```

```
  <Calibration CalibrationOffset="1.0" BeamOffsets="0.00 1.00 2.00 3.00 4.00
  5.00 6.00 7.00 8.00 9.00 10.00 11.00 12.00 13.00 14.00 15.00 16.00 17.00
  18.00 19.0"/>
```

11 PingData Element

Tag

PingData

Description

All ping Packets must include a PingData element, as it contains the sample data for the ping. The format for a PingData element should be the opening <PingData> tag (including parameters), followed by the ping's sample data, written in binary, little-endian, format. The samples should be written in order from the shortest range to the longest. The element needs to be closed by the </PingData> tag.

Care should be taken that the size of each sample value matches the SamplePrecision attribute. For example:

- if SamplePrecision is Double then each binary sample should be 8 bytes
- if SamplePrecision is Float then each binary sample should be 4 bytes

Note that for SinglebeamAnglePing data there are two values per sample, the Minor axis (Alongship) value followed by the Major axis (Athwartship) value.

The ResultDataType attribute may be used to specify multiple values to generate, when the EVD file is added to an Echoview filesset. See also [Power equations](#).

For example: ...StorageDataType="Power" ResultDataType="Sv, TS"...

MultibeamPing data contains multiple values for each range sample, but in this case the number of values is defined by the BeamCount attribute, which must be specified in the [BeamAngles](#) element. The data is then written out as beam 0 – beam n for the first range value, then beam 0 – beam n for the second range value etc.

The opening tag contains several attributes which describe the data to Echoview, and these attributes must be specified.

Compression

Binary sample data may be compressed to a specified SamplePrecision Compression Quality. For example:

- SamplePrecision = "Double" and indicates No compression.
- SamplePrecision = "SingleTarget" and indicates No compression.
- SamplePrecision = "Boolean" and indicates No compression.
- SamplePrecision = "CompressedBoolean" and indicates Boolean compression.
- SamplePrecision = "CompressedDouble" and indicates Highest (Lossless) Quality.
- SamplePrecision = "CompressedFloat" and indicates High Quality.

The attribute CompressedByteCount is required to read the compressed data. See also [Compression algorithms](#).

Attributes

Name	Type	Value	Packet use	Notes
ResultDataType	String	Sv, TS, Power, Angle, UnspecifiedDb, SingleTarget, Boolean	MultibeamAnglePing MultibeamPing SinglebeamAnglePing SinglebeamPing	The type of ping data to be generated when loaded in Echoview. Note that multiple values specified in one string are supported for SinglebeamPing Packets, E.g. "TS Sv". See the Calibration element for values used in Power to Sv and Power to TS conversion.
StorageDataType	String	Sv, TS, Power, Angle, UnspecifiedDb, SingleTarget, Boolean	MultibeamAnglePing MultibeamPing SinglebeamAnglePing SinglebeamPing	The type of the ping data as it is stored in the file.

Name	Type	Value	Packet use	Notes
CompressedByteCount	Integer	1 ... n	MultibeamAnglePing MultibeamPing SinglebeamAnglePing SinglebeamPing	The number of compressed bytes present in the PingData element This attribute is required when SamplePrecision is CompressedDouble or CompressedFloat.

Name	Type	Value	Packet use	Notes
MajorAxisSteeredAngle	Real	Decimal degrees with a precision up to 10 decimal places.	Optional for SinglebeamAnglePing SinglebeamPing	Can be used for single beam variables derived from multibeam data. Represents the major-axis steered angle for the beam. Echoview only supports a steered angle from the first ping.
MinorAxisSteeredAngle	Real	Decimal degrees with a precision up to 10 decimal places.	Optional for SinglebeamAnglePing SinglebeamPing	Can be used for single beam variables derived from multibeam data. Represents the minor-axis steered angle for the beam. Echoview only supports a steered angle from the first ping.
SampleCount	Integer	0 ... n	MultibeamAnglePing MultibeamPing SinglebeamAnglePing SinglebeamPing	The number of samples in this ping.
SamplePrecision	String	Float, Double, Boolean, CompressedDouble, CompressedFloat, CompressedBoolean, SingleTarget	MultibeamAnglePing MultibeamPing SinglebeamAnglePing SinglebeamPing	The precision of the sample data values. Binary sample data may be compressed to a Compression Quality . See also PingData element: Compression. Note: Echoview 9 EVD files that use deprecated low and medium compression can be read.

Name	Type	Value	Packet use	Notes
StartRange	Double	Positive real	MultibeamAnglePing MultibeamPing SinglebeamAnglePing SinglebeamPing	The start range (m) of the first sample in this ping.
StopRange	Double	Positive real	MultibeamAnglePing MultibeamPing SinglebeamAnglePing SinglebeamPing	The end range (m) of the last sample in this ping.

Examples

```
<Packet Type="SinglebeamPing">
```

```
  <PingData ResultDataType="Sv" StorageDataType="Power"
    SamplePrecision="Double" StartRange="0.02" StopRange="99.95"
    SampleCount="2094">BINARY PING DATA</PingData>
```

...

```
<Packet Type="MultibeamPing">
```

```
  <PingData ResultDataType="Sv" StorageDataType="Sv" SamplePrecision="Float"
    StartRange="0.046" StopRange="499.992" SampleCount="5319">BINARY PING
    DATA</PingData>
```

...

```
<Packet Type="MultibeamAnglePing">
```

```
  <PingData ResultDataType="Angle" StorageDataType="Angle"
    SamplePrecision="Float" StartRange="0.096685" StopRange="749.983992"
    SampleCount="3878">BINARY PING DATA</PingData>
```

...

```
<Packet Type="SinglebeamAnglePing">
```

```
  <PingData ResultDataType="Angle" StorageDataType="Angle"
    SamplePrecision="CompressedFloat" StartRange="0.0469961599"
    StopRange="497.7363293033" SampleCount="5295" CompressedByteCount="48578"
    MinorAxisSteeredAngle="0.0" MajorAxisSteeredAngle="-44.306098938">BINARY
    PING DATA</PingData>
```

...

```
<Packet Type="MultibeamPing">
```

```
  <PingData ResultDataType="Sv" StorageDataType="Sv"
    SamplePrecision="CompressedFloat" StartRange="0.0469961599"
    StopRange="499.9921449776" SampleCount="5319" CompressedByteCount="373413">
    BINARY PING DATA</PingData>
```



```
<Packet Type="SinglebeamAnglePing">
```

```
  <PingData ResultDataType="Angle" StorageDataType="Angle"  
  SamplePrecision="CompressedFloat" StartRange="0.0469961599"  
  StopRange="499.9921449776" SampleCount="5319" CompressedByteCount="47124"  
  MinorAxisSteeredAngle="0.0" MajorAxisSteeredAngle="22.7203216553">BINARY  
  PING DATA</PingData>
```

```
...
```

```
<Packet Type="SinglebeamPing">
```

```
  <PingData ResultDataType="SingleTarget" StorageDataType="SingleTarget"  
  SamplePrecision="SingleTarget" StartRange="0.006" StopRange="29.9939999243"  
  SampleCount="4">BINARY PING DATA</PingData>
```

```
...
```

```
<Packet Type="SinglebeamPing">
```

```
  <PingData ResultDataType="Boolean" StorageDataType="Boolean"  
  SamplePrecision="CompressedBoolean" StartRange="0.006"  
  StopRange="29.9939999243" SampleCount="2499" CompressedByteCount="20">  
  BINARY PING DATA</PingData>
```

```
...
```

```
<Packet Type="MultibeamPing">
```

```
  <PingData ResultDataType="Boolean" StorageDataType="Boolean"  
  SamplePrecision="CompressedBoolean" StartRange="0.0" StopRange="103.224"  
  SampleCount="782" CompressedByteCount="790">BINARY PING DATA</PingData>
```

12 BeamAngles Element

Tag

BeamAngles

Description

All [MultibeamPing](#) Packets must include a `BeamAngles` element, which describes the angular position for each beam of the sample data. This element supports two modes, depending on the `BeamAngleMode` attribute – `Constant` and `Variable`. In `Constant` mode the angles for each beam are calculated using the number of beams and the beam spread, assuming they are evenly spaced. In `Variable` mode the angle for each beam is individually specified.

The format for a `BeamAngles` element should begin with the opening `<BeamAngles>` tag, and finish with the `</BeamAngles>` closing tag. If the `BeamAngleMode` attribute is `Variable` then the opening tag should be immediately followed by the beam angles, written in binary, little-endian, format.

Each beam angle should be in double precision taking up 8 bytes, and should be written in the same order as the data in the [PingData](#) element. If the `BeamAngleMode` is `Constant` then no data needs to be written between the opening and closing tags.

Note: Multibeam tilt and multibeam bearing are specified under the `Parameters` element.

Attributes

Name	Type	Value	Required	Notes
BeamCount	Integer	1 ... n	Yes	The number of beams within each ping.
BeamSpread	Double	0.0000000000 ... 360.0000000000	Yes	The angular spread of the beam fan, in degrees.
BeamAngleMode	String	Constant, Variable	Yes	The mode for determining the beam angles. Where <code>BeamAngleMode="Variable"</code> , Binary Beam Angle data should be written in radians. And beam angles should be written starting from the smallest to the largest angle.

Examples

```
<Packet Type="MultibeamAnglePing">
  <BeamAngles BeamCount="21" BeamSpread="70.979"
  BeamAngleMode="Variable">BINARY BEAM ANGLE DATA</BeamAngles>
</Packet>
```

```
<Packet Type="MultibeamAnglePing">
  <BeamAngles BeamCount="21" BeamSpread="70.979"
  BeamAngleMode="Constant"></BeamAngles>
</Packet>
```

See also [Complete Packet Examples: MultibeamPing H-mode data](#).

13 BeamsWithData Element

Tag

BeamsWithData

Description

Multibeam pings can become very large due to the number of samples present in each beam. This is necessary if all the beams contain useful data, but for some instruments only specific beams contain data while the others are empty. In this case it is useful to specify which beams have data, and then only write this data to the ping data element.

The `BeamsWithData` element is optional, and should only be specified when such a situation arises. It consists of the opening `<BeamsWithData>` tag followed immediately by a series of [booleans](#) written as 8 bit binary values (in little endian), and then the closing `</BeamsWithData>` tag. There must be one Boolean value per beam, a value of true indicates that this beam has data, false indicates there is no data.

The following [PingData](#) elements will contain data only for the beams marked as having data. For example, a 400 beam echosounder with data in every other beam would have a `BeamsWithData` element with a `BeamCount` of 400, a `BeamAngles` element with a `BeamCount` of 400 and 200 entries per beam in the `PingData` element.

The `BeamsWithData` element must be written **before** the `PingData` element.

Attributes

Name	Type	Value	Required	Notes
BeamCount	Integer	1 ... n	Yes	The number of beams within each ping.

Example

```
<BeamsWithData BeamCount="400">BINARY BOOLEAN DATA</BeamsWithData>
```

14 SingleTarget Element

Tag

SingleTarget

Description

Single target data may be recorded within the PingData element of SinglebeamPing Packets. Each single target is specified by a <SingleTarget ... /> element. SingleTarget attributes are specified within the element.

When using the SingleTarget element, associated PingData attributes must be specified.

Echoview exports single target data to the Echoview Data File Format.

The exported values cover single target data that may originate from:

- Echoview single target detection operators.
- Instrument single target detections saved to file.
- Single target data derived from targets found with Echoview multibeam target detection.

Note: Absent (Real) values associated with multibeam target detection are recorded as -9.9e+37.

Attributes

Name	Type	Value	Required	Notes
Area	Real	Squared centimeters.	No	The estimated sample area for a single target derived from a target found with multibeam target detection.
Compactness	Real	Unitless ratio	No	The estimated sample compactness for a single target derived from a target found with multibeam target detection. $Compactness = \frac{(Target\ perimeter)^2}{4\pi * Target\ area}$
CompTS	Real	dB	Yes	Single target compensated TS value. $CompTS = UncompTS + Correction(\text{calculated by a Beam compensation model})$ Where $UncompTS$ is the single target TS (dB) value. Beam compensation is applied to a TS value to correct for the variation of response in the transducer beam. A Beam compensation model, uses mathematics to emulate the transducer beam pattern and can be used to estimate what the TS would be if the target lay centrally in the beam. Models have limits to their validity. Predictions outside the validity limits can be unreliable.

Name	Type	Value	Required	Notes
DetectionMethod	String	Unknown, Multibeam, SinglebeamMethod1, SinglebeamMethod2, SplitbeamMethod1, SplitbeamMethod2, WidebandMethod2, WidebandPulseCompressed, FurunoFCV	Yes	<p>Specifies the single target detection method for the single target data:</p> <p>Unknown = Unknown method.</p> <p>Multibeam = Single target derived from multibeam target detection data.</p> <p>SinglebeamMethod1 = Single target detection – single beam (method 1) operator.</p> <p>SinglebeamMethod2 = Single target detection – single beam (method 2) operator.</p> <p>SplitbeamMethod1 – Single target detection – split beam (method 1) operator.</p> <p>SplitbeamMethod2 = Single target detection -split beam (method 2) operator.</p> <p>WidebandMethod2 = Single target detection – wideband operator.</p> <p>WidebandPulseCompressed = Single target detection – wideband operator. This string is used for EVD single target data output by Echoview 10, under the deprecated attribute PulseCompressed.</p> <p>FurunoFCV = Single target detection – Furuno FCV-30 operator.</p> <p>The value for DetectionMethod is used by Echoview when handling of single target samples.</p>
IntStatus	Integer	-1, 0, 1, 2, 3, 4	Yes	<p>Specifies the Echoview status for a single target:</p> <p>-1 = Error</p> <p>0 = Present</p> <p>1 = Single target is excluded by Threshold settings on the Data* page</p> <p>2 = Single target is excluded by Filter settings on the Data* page</p> <p>3 = Single target is excluded by Exclusion settings on the Analysis* page</p> <p>4 = Single target is outside the selected region</p> <p>*Refers to the Data and Analysis pages on the Variable Properties dialog box.</p>

Name	Type	Value	Required	Notes
IntTargetClass	Integer	Integer	Yes	<p>The Echoview single target Target class.</p> <p>0 corresponds to the Unclassified Targets class.</p> <p>IntTargetClass integers are assigned in order from Unclassified Targets.</p>
Length	Real	Centimeters.	No	<p>Single target Target length as calculated by the equation used by the Echoview Target Length Calculator operator.</p> <p>$CompTS = A \log(L) + B$</p> <p>Where:</p> <p>CompTS is the compensated TS value of the single target.</p> <p>L (cm) is the length of the target.</p> <p>A is the target species Slope.</p> <p>B is the target species Intercept.</p> <p>Species data for A and B are published in fisheries acoustic studies. For more information refer to the Echoview Help file -Target Length Calculator algorithm.</p>
LengthAcrossBeams	Real	Centimeters	No	<p>The estimated target length across beams for a single target derived from a target found with multibeam target detection.</p>
LengthUncompensated	Real	Meters	No	<p>Single target Target length as calculated by the equation used by the Echoview Target Length Calculator operator.</p> <p>$UncompTS = A \log(L) + B$</p> <p>UncompTS is the uncompensated TS value of the single target.</p> <p>A, B, L are defined as for single target Length (see above)</p>
ManualLength	Real	Centimeters	No	<p>The manually measured and stored target length for a single target derived from a target found with multibeam target detection.</p>
MajorAxisAngle	Real	Decimal degrees	Yes	<p>Single target major axis angle.</p>
MidpointArea		Squared Centimeters	No	<p>The estimated edge-midpoint sample area for a single target derived from a target found with multibeam target detection.</p>

Name	Type	Value	Required	Notes
MidpointCompactness		Unitless ratio	No	The estimated edge-midpoint sample compactness for a single target derived from a target found with multibeam target detection.
MidpointPerimeter		Centimeters	No	The estimated edge-midpoint sample perimeter for a single target derived from a target found with multibeam target detection.
MinorAxisAngle	Real	Decimal degrees	Yes	Single target minor axis angle.
Perimeter		Centimeters	No	The estimated edge-sample perimeter for a single target derived from a target found with multibeam target detection.
PLDL	Real	dB	Yes	Single target Pulse Length Determination Level (PLDL). The PLPD defines the number of decibels below the peak value of a detected single target pulse at which the pulse length is determined during single target detection.
PulseCompressed	Boolean	True, False	Yes	Indicates single targets derived from pulse compressed wideband data. Note: Echoview 11 can read EVD files that use this attribute. However Echoview 11 does not output the PulseCompressed attribute. The attribute DetectionMethod is used instead.
PulseLengthNormAtPLDL	Real	Unitless ratio	Yes	The length of a single target pulse (at the PLDL) normalized to the transmitted pulse length.
PulseLengthNorm6dB	Real	Unitless ratio	Yes	The length of a single target pulse (at 6dB down from the peak) normalized to the transmitted pulse length
PulseLengthNorm18dB	Real	Unitless ratio	Yes	The length of a single target pulse (at 18dB down from the peak) normalized to the transmitted pulse length
PulseLengthNorm12dB	Real	Unitless ratio	Yes	The length of a single target pulse (at 12dB down from the peak) normalized to the transmitted pulse length
PulseStartNormPLDL	Real	Unitless ratio	Yes	Distance between the start and peak of a single target pulse (at the PLDL) normalized to the transmitted pulse length.
PulseStartNorm6dB	Real	Unitless ratio	Yes	Distance between the start and peak of a single target pulse (at the PulseLengthNorm6dB) normalized to the transmitted pulse length.

Name	Type	Value	Required	Notes
PulseStartNorm12dB	Real	Unitless ratio	Yes	Distance between the start and peak of a single target pulse (at the PulseLengthNorm12dB) normalized to the transmitted pulse length.
PulseStartNorm18dB	Real	Unitless ratio	Yes	Distance between the start and peak of a single target pulse (at the PulseLengthNorm18dB) normalized to the transmitted pulse length.
Range	Real	Meters	Yes	Single target range (m)
RangeExtent	Real	Centimeters	No	Target range extent is calculated as the range difference between the shallowest sample and the deepest sample for a single target derived from a target found with multibeam target detection
SDMajorAxis	Real	Decimal degrees	Yes	The maximum standard deviation of the Major-axis angles of all samples within a single target pulse determined at the PLDL (degrees).
SDMinorAxis	Real	Decimal degrees	Yes	The maximum standard deviation of the Minor-axis angles of all samples within a single target pulse determined at the PLDL (degrees).
TargetOrientation	Real	Decimal degrees	No	The angle between the target Length derived axis and the line perpendicular to the transducer axis. The target Length axis is defined as the line joining the two most distant samples for a single target derived from a target found with multibeam target detection.
UncompTS	Real	dB	Yes	Uncompensated TS value of the single target.
Variation	Real	Unitless	No	<p>The target intensity variation of the samples for a single target derived from a target found with multibeam target detection.</p> $Variation = \frac{\sigma}{\mu}$ <p>σ is the standard deviation of the intensity of the samples in the target. μ is mean intensity of samples in the target.</p>

Example

Single target data

```
<SingleTarget Range="2.796396" CompTS="-43.738220" UncompTS="-45.582551"  
MinorAxisAngle="1.875000" MajorAxisAngle="-0.602679" Length="-9.9e+37"  
PulseLengthNormAtPLDL="1.500000" PLDL="6.000000" PulseLengthNorm6dB="1.500000"  
PulseLengthNorm12dB="2.750000" PulseLengthNorm18dB="4.000000"  
SDMinorAxis="0.463482" SDMajorAxis="0.597519" PulseStartNorm6dB="-0.500000"  
PulseStartNorm12dB="-1.000000" PulseStartNorm18dB="-1.500000"  
PulseStartNormPLDL="-0.500000" IntSamplesInPulse="7" Status="0" TargetClass="0"  
LengthUncompensated="-9.9e+37" LengthAcrossBeams="-9.9e+37" ManualLength="-  
9.9e+37" Perimeter="-9.9e+37" MidpointPerimeter="-9.9e+37" Area="-9.9e+37"  
MidpointArea="-9.9e+37" Thickness="-9.9e+37" Compactness="-9.9e+37"  
MidpointCompactness="-9.9e+37" Variation="-9.9e+37" RangeExtent="-9.9e+37"  
TargetOrientation="-9.9e+37"/>
```

Single target data with deprecated attribute PulseCompressed

```
<SingleTarget Range="2.936000" CompTS="-89.153188" UncompTS="-91.970168"  
MinorAxisAngle="-0.496933" MajorAxisAngle="-2.229737" Length="-9.9e+37"  
PulseCompressed="True" PulseLengthNormAtPLDL="1.038624" PLDL="6.000000"  
PulseLengthNorm6dB="1.038624" PulseLengthNorm12dB="1.557936"  
PulseLengthNorm18dB="9.347614" SDMinorAxis="0.295917" SDMajorAxis="0.265903"  
PulseStartNorm6dB="-0.519312" PulseStartNorm12dB="-0.519312"  
PulseStartNorm18dB="-0.519312" PulseStartNormPLDL="-0.519312"  
IntSamplesInPulse="3" Status="0" TargetClass="0" LengthUncompensated="-9.9e+37"  
LengthAcrossBeams="-9.9e+37" ManualLength="-9.9e+37" Perimeter="-9.9e+37"  
MidpointPerimeter="-9.9e+37" Area="-9.9e+37" MidpointArea="-9.9e+37" Thickness="-  
9.9e+37" Compactness="-9.9e+37" MidpointCompactness="-9.9e+37" Variation="-  
9.9e+37" RangeExtent="-9.9e+37" TargetOrientation="-9.9e+37"/>
```

Single target data with attribute DetectionMethod

```
<SingleTarget Range="2.389725" CompTS="-40.654405" UncompTS="-42.325190"  
MinorAxisAngle="0.871865" MajorAxisAngle="1.691374" Length="-9.9e+37"  
DetectionMethod="SplitbeamMethod2" PulseLengthNormAtPLDL="1.347368"  
PLDL="6.000000" PulseLengthNorm6dB="1.347368" PulseLengthNorm12dB="1.852632"  
PulseLengthNorm18dB="2.357895" SDMinorAxis="0.014883" SDMajorAxis="0.025688"  
PulseStartNorm6dB="-0.673684" PulseStartNorm12dB="-1.010526"  
PulseStartNorm18dB="-1.010526" PulseStartNormPLDL="-0.673684"  
IntSamplesInPulse="9" Status="0" TargetClass="0" LengthUncompensated="-9.9e+37"  
LengthAcrossBeams="-9.9e+37" ManualLength="-9.9e+37" Perimeter="-9.9e+37"  
MidpointPerimeter="-9.9e+37" Area="-9.9e+37" MidpointArea="-9.9e+37" Thickness="-  
9.9e+37" Compactness="-9.9e+37" MidpointCompactness="-9.9e+37" Variation="-  
9.9e+37" RangeExtent="-9.9e+37" TargetOrientation="-9.9e+37"/>
```

15 Complete Packet Examples

SinglebeamPing with TRFactor

```
<Packet Type="TransducerList">
  <Transducer ID="1" Echosounder="Sonic"/>
</Packet>

<Packet Type="SinglebeamPing">
  <Parameters Time="03/07/2013 12:44:29.0000" Transducer="1" Channel="0"
  Source="Fileset1: Sv split beam pings T1"/>

  <Calibration AbsorptionCoefficient="0.0094" Frequency="38.0"
  TransmittedPulseLength="0.3" SoundSpeed="1400.0" TwoWayBeamAngle="-19.1"
  TRFactor="55.5"/>

  <PingData ResultDataType="Sv" StorageDataType="Power"
  SamplePrecision="Double" StartRange="0.0175" StopRange="100.0125"
  SampleCount="2857">BINARY PING DATA</PingData>

</Packet>
```

SinglebeamPing

```
<Packet Type="TransducerList">
  <Transducer ID="1" Echosounder="SimradEK60Raw"/>
</Packet>

<Packet Type="SinglebeamPing">
  <Parameters Time="23/03/2006 23:18:18.4230" Transducer="1" Channel="0"
  Source="Fileset1: Sv raw pings T1"/>

  <Calibration AbsorptionCoefficient="0.0097472" Frequency="38.0"
  TransmittedPulseLength="1.024" SoundSpeed="1500.0" TwoWayBeamAngle="-20.6"
  MinorAxis3dbBeamAngle="7.1" MajorAxis3dbBeamAngle="7.1"
  TransducerGain="26.5" TransmittedPower="200.0" MinorAxisAngleOffset="0.0"
  MajorAxisAngleOffset="0.0" MinorAxisAngleSensitivity="21.9"
  MajorAxisAngleSensitivity="21.9"/>

  <PingData ResultDataType="Sv" StorageDataType="Power"
  SamplePrecision="Double" StartRange="0.0959999998"
  StopRange="249.8879993691" SampleCount="1301">BINARY PING DATA</PingData>

</Packet>
```

SinglebeamPing Single target data

```
<Packet Type="SinglebeamPing">
  <Parameters Time="26/07/2000 23:52:14.7600" Transducer="1" Channel="0"
    Source="Single target detection - split beam (method 2) 1"/>
  <Calibration AbsorptionCoefficient="0.0373058" Frequency="120.0"
    TransmittedPulseLength="0.064" SoundSpeed="1500.0" TwoWayBeamAngle="-
    20.799999" MinorAxis3dbBeamAngle="7.1" MajorAxis3dbBeamAngle="7.1"
    TransducerGain="22.8" TransmittedPower="100.0" MinorAxisAngleOffset="0.0"
    MajorAxisAngleOffset="0.0" MinorAxisAngleSensitivity="21.0"
    MajorAxisAngleSensitivity="21.0"/>
  <PingData ResultDataType="SingleTarget" StorageDataType="SingleTarget"
    SamplePrecision="SingleTarget" StartRange="0.006" StopRange="29.9939999243"
    SampleCount="4">
    <SingleTarget Range="2.796396" CompTS="-43.738220" UncompTS="-
    45.582551" MinorAxisAngle="1.875000" MajorAxisAngle="-0.602679"
    Length="-9.9e+37" PulseLengthNormAtPLDL="1.500000" PLDL="6.000000"
    PulseLengthNorm6dB="1.500000" PulseLengthNorm12dB="2.750000"
    PulseLengthNorm18dB="4.000000" SDMinorAxis="0.463482"
    SDMajorAxis="0.597519" PulseStartNorm6dB="-0.500000"
    PulseStartNorm12dB="-1.000000" PulseStartNorm18dB="-1.500000"
    PulseStartNormPLDL="-0.500000" IntSamplesInPulse="7" Status="0"
    TargetClass="0" LengthUncompensated="-9.9e+37" LengthAcrossBeams="-
    9.9e+37" ManualLength="-9.9e+37" Perimeter="-9.9e+37"
    MidpointPerimeter="-9.9e+37" Area="-9.9e+37" MidpointArea="-9.9e+37"
    Thickness="-9.9e+37" Compactness="-9.9e+37" MidpointCompactness="-
    9.9e+37" Variation="-9.9e+37" RangeExtent="-9.9e+37"
    TargetOrientation="-9.9e+37"/>
    ... </PingData>
  </Packet>
```

SinglebeamPing Boolean data

```
<Packet Type="SinglebeamPing">
  <Parameters Time="26/07/2000 23:52:14.7600" Transducer="1" Channel="0"
    Source="Target samples bitmap 1"/>
  <Calibration AbsorptionCoefficient="0.0373058" Frequency="120.0"
    TransmittedPulseLength="0.064" SoundSpeed="1500.0" TwoWayBeamAngle="-
    20.799999" MinorAxis3dbBeamAngle="7.1" MajorAxis3dbBeamAngle="7.1"
    TransducerGain="22.8" TransmittedPower="100.0" MinorAxisAngleOffset="0.0"
    MajorAxisAngleOffset="0.0" MinorAxisAngleSensitivity="21.0"
    MajorAxisAngleSensitivity="21.0"/>
  <PingData ResultDataType="Boolean" StorageDataType="Boolean"
    SamplePrecision="CompressedBoolean" StartRange="0.006"
    StopRange="29.9939999243" SampleCount="2499"
    CompressedByteCount="25">BINARY PING DATA</PingData>
  </Packet>
```

SinglebeamAnglePing

```
<Packet Type="TransducerList">
  <Transducer ID="1" Echosounder="SimradEK60Raw"/>
</Packet>
<Packet Type="SinglebeamAnglePing">
  <Parameters Time="23/03/2006 23:18:18.4230" Transducer="1" Channel="0"
  Source="Fileset1: angular position raw pings T1"/>
  <Calibration AbsorptionCoefficient="0.0097472" Frequency="38.0"
  TransmittedPulseLength="1.024" SoundSpeed="1500.0" TwoWayBeamAngle="-20.6"
  MinorAxis3dbBeamAngle="7.1" MajorAxis3dbBeamAngle="7.1"
  TransducerGain="26.5" TransmittedPower="200.0" MinorAxisAngleOffset="0.0"
  MajorAxisAngleOffset="0.0" MinorAxisAngleSensitivity="21.9"
  MajorAxisAngleSensitivity="21.9"/>
  <PingData ResultDataType="Angle" StorageDataType="Angle"
  SamplePrecision="Float" StartRange="0.0959999998"
  StopRange="249.8879993691" SampleCount="1301">BINARY PING DATA</PingData>
</Packet>
```

MultibeamPing

```
<Packet Type="MultibeamPing">
  <Parameters Time="13/07/2008 04:10:29.9940" Transducer="26" Channel="0"
  Source="Fileset1: Sv pings formed beams" PingMode="Multibeam"/>
  <Calibration AbsorptionCoefficient="0.0205062" SoundSpeed="1468.63"/>
<BeamAngles BeamCount="21" BeamSpread="95.2161865234" BeamAngleMode="Variable">
  BINARY BEAM ANGLE DATA </BeamAngles>
  <PingData ResultDataType="Sv" StorageDataType="Sv" SamplePrecision="Float"
  StartRange="0.0469961599" StopRange="499.9921449776" SampleCount="5319">
  BINARY PING DATA </PingData>
</Packet>
```

MultibeamPing Boolean data

```
<Packet Type="MultibeamPing">
  <Parameters Time="14/05/1999 23:09:58.4600" Transducer="0" Channel="0"
  Source="Region bitmap 1" PingMode="Multibeam"/>
  <Calibration/>
  <BeamAngles BeamCount="128" BeamSpread="120.0"
  BeamAngleMode="Constant"></BeamAngles>
  <PingData ResultDataType="Boolean" StorageDataType="Boolean"
  SamplePrecision="CompressedBoolean" StartRange="0.0" StopRange="50.2734375"
  SampleCount="246" CompressedByteCount="248">BINARY PING DATA</PingData>
</Packet>
```

MultibeamAnglePing

```
<Packet Type="TransducerList">
    <Transducer ID="26" Echosounder="SimradME70"/>
</Packet>
<Packet Type="MultibeamAnglePing">
    <Parameters Time="13/07/2008 04:10:29.9940" Transducer="26" Channel="0"
    Source="Fileset1: angular position pings formed beams"
    PingMode="Multibeam"/>
    <Calibration AbsorptionCoefficient="0.0205062" SoundSpeed="1468.63"/>
    <BeamAngles BeamCount="21" BeamSpread="95.2161865234"
    BeamAngleMode="Variable"> BINARY BEAM ANGLE DATA </BeamAngles>
    <PingData ResultDataType="Angle" StorageDataType="Angle"
    SamplePrecision="Float" StartRange="0.0469961599"
    StopRange="499.9921449776" SampleCount="5319"> BINARY PING DATA </PingData>
</Packet>
```

MultibeamPing H-mode data

```
<Packet Type="TransducerList">
    <Transducer ID="16" Echosounder="Simrad SX90, SH90 or SU90"/>
</Packet>
<Packet Type="MultibeamPing">
    <Parameters Time="03/11/2011 11:17:44.0910" Transducer="16" Channel="0"
    Source="Fileset 1: Sv complex beamformed pings Omni (H-mode)"
    PingMode="HMode" TiltAngle="10.008545" Bearing="82.0"/>
    <Calibration AbsorptionCoefficient="0.006" SoundSpeed="1492.0"/>
    <BeamAngles BeamCount="64" BeamSpread="360.0"
    BeamAngleMode="Constant"></BeamAngles>
    <PingData ResultDataType="Sv" StorageDataType="Sv"
    SamplePrecision="CompressedFloat" StartRange="0.0737644815"
    StopRange="60.2655814047" SampleCount="408" CompressedByteCount="84116">
    BINARY PING DATA </PingData>
</Packet>
```

MultibeamPing BeamsWithData

```
<Packet Type="MultibeamPing">
  <Parameters Time="30/05/2008 01:51:04.0080" Channel="0" Source="Fileset1:
  Sv beamformed pings" PingMode="HMode" TiltAngle="270.0"/>
  <Calibration AbsorptionCoefficient="1.0" SoundSpeed="1500.0"/>
  <BeamAngles BeamCount="1600" BeamSpread="360.0000000000"
  BeamAngleMode="Constant"></BeamAngles>
  <BeamsWithData BeamCount="1600">BINARY BOOLEAN DATA</BeamsWithData>
  <PingData ResultDataType="Sv" StorageDataType="Sv" SamplePrecision="Float"
  StartRange="0.0" StopRange="4.0677966102" SampleCount="952"> BINARY PING
  DATA </PingData>
</Packet>
```

Position

```
<Packet Type="Position">
  <Parameters Time="28/08/1996 04:40:03.8500" Channel="0" Latitude="-
  42.24994303385" Longitude="145.30068359375" Status="Good" Source="Primary
  fileset: position GPS fixes"/>
</Packet>
```

Heading

```
<Packet Type="Heading">
  <Parameters Time="08/11/2009 07:16:04.9450" Channel="0"
  Heading="24.200000"/>
</Packet>
```

DepthLine

```
<Packet Type="DepthLine">
  <Parameters Time="06/07/2009 07:21:39.8760" Channel="0" Depth="221.649004"
  Status="Good" Source="Best bottom candidate line pick 1"/>
</Packet>
```

Distance

```
<Packet Type="Distance">
  <Parameters Time="13/07/2008 04:10:29.9940" Channel="0"
  Distance="2944.231000"/>
</Packet>
```




RangeLine

```
<Packet Type="RangeLine">  
  <Calibration Frequency="120.0" SoundSpeed="1463.73"/>  
  <Parameters Time="06/07/2009 07:21:39.8760" Channel="0" Transducer="2"  
    Range="121.506993" Status="Good" Source="Fileset1: line data sounder  
    detected bottom T2"/>  
</Packet>
```